JONSA AUSTRALIA

PASSIVE

SPLITTERS

2 AMP RATED

SPLITTER 2 WAY F TYPE 5 ... 2400 MHz REVERSE POWER PASS IN-OUT ALL PORTS

REVERSE POWER PASSING!

Product Code: CAS2FA/MSRP

FOXTEL: F30981

new

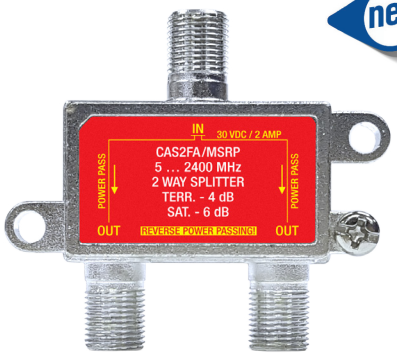

FEATURES

- Splits the SMATV signal into two outputs for RF distribution
- Solder back body with high quality housing
- Earthing terminals included with wall mounting lugs built into the housing
- Power passing feature from the input to all output ports

Specifications	Frequency (MHz)	CAS2FA/MSRP
Insertion Loss IN-OUT (dB)	5 … 40	≤ 4
	40 … 1000	≤ 4.5
	1000 … 1750	≤ 5
	1750 … 2050	≤ 5.5
	2050 … 2400	≤ 6
Isolation OUT-OUT (dB)	5 … 40	≥ 35
	40 … 1000	≥ 30
	1000 … 1750	≥ 30
	1750 … 2050	≥ 28
	2050 … 2400	≥ 25
Input Return Loss (dB)	5 … 40	≥ 10
	40 … 1000	≥ 10
	1000 … 1750	≥ 10
	1750 … 2050	≥ 10
	2050 … 2400	≥ 10
Output Return Loss (dB)	5 … 40	≥ 10
	40 … 1000	≥ 10
	1000 … 1750	≥ 10
	1750 … 2050	≥ 10
	2050 … 2400	≥ 10
Screening RF	5 … 1000	≥ 75
Screening IF	1000 … 2400	≥ 65
Impedance	75 Ω	
Housing	Solder Shielded Bottom Plate	
Mounting Screws	± PM 4 x 18 A3 Nickel-Plated, 2 pcs	
Power Pass	IN to All Ports OUT, 30 VDC 2 Amp	
Earthing Terminal	Yes	

Head Office: Unit D2, 3-29 Birnie Avenue, Lidcombe NSW 2141 Australia
WA Branch: Unit 1, 7 Mallaig Way, Canning Vale WA 6155 Australia
+61 1300 660 155 www.jonsa.com.au sales@jonsa.com.au
PO Box: 6147, Silverwater NSW 1811 Australia

Copyright © Jonsa Australia Pty Ltd. All Rights Reserved. Version: 2.0

Quality Management : ISO 9001